



DATA SUBMITTAL

Microbubble Eliminator

Date: 9/25

Models: ZU0002, ZU0003, ZU0004, ZU0005,
ZU0006, ZU0011, ZU0012

Job Name: _____

Submitted By: _____

Date: _____

Job Location: _____

Approved By: _____

Date: _____

Order No.: _____

Date: _____

Engineer: _____

Notes: _____

Contractor: _____

Sales Rep.: _____

Description

The Zilmet Microbubble Eliminator is designed to vent trapped air within sealed systems at pressures up to 150psig. This helps to maintain optimum system efficiency, improves energy usage, reduces system corrosion, eliminates noise from system pipe work and helps to extend the working life of system heat pumps.

Construction:

Body: Brass
Internal Float: Plastic


Performance Conditions

Max Design Temperature: 230°F
Max Operating Pressure: 150 PSIG

Connections:

ZU0002: 1" NPT; ZU0003: 1-¼" NPT; ZU0004: ¾" SWT; ZU0005: 1" SWT;
ZU0006: 1-¼" SWT; ZU0011: 1-½" NPT; ZU0012: 2" NPT

ZU0002, ZU0003, ZU0011, ZU0012

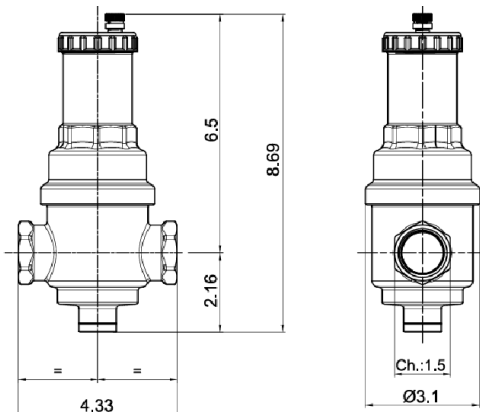

ZU0004, ZU0005, ZU0006

