


intamix

TANK MAXIMIZER

THERMOSTATIC MIXING VALVE

ZTM7550G

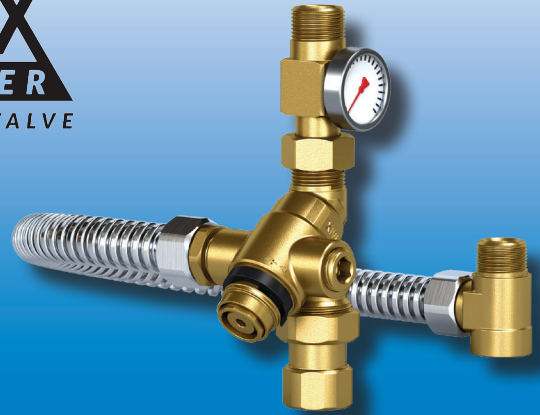

The Zilmet Intamix Maximizer is installed on a water heater and will allow the water heater to safely operate at a higher set point.

This delivers:

1. More usable hot water so your 50 gallon water heater acts like an 80 gallon water heater
2. Higher temperatures to kill water-borne bacteria such as Legionella

Product Features

- Meets two different ASSE standards
 - o ASSE1070 with factory preset of 120F
 - o ASSE1017 with adjustment for hot water distribution systems
- Temperature gauge and stainless steel hose
- Internal non-return valve with stainless steel mesh screen to help prevent debris from entering valves inner components

Product Benefits

- Tank connection union allows valve orientation towards work direction
- Two recirculation loop ports for ultimate flexibility in installation
- Temperature locking hex for tamper resistance
- Angled body for convenient accessibility during maintenance

technical specifications	
temperature range	95° F – 140° F
factory set temperature	120° F
minimum flow rate	1.2 GPM
max inlet temperature	195° F
max inlet pressure	150 psi

Model number ZTM7550G

Zilmet Intamix Tank Maximizer Thermostatic Mixing Valve

List Price: \$425.95



ASSE 1070 ASME A112.1070 & CSA B125.70
ASSE 1017 & CSA B125.3

from Zilmet



globally renowned



INFO@ZILMETUSA.COM | ZILMETUSA.COM