



SUBMITTAL

ZADSN NON-REMOVABLE-SERIES
AIR & DIRT SEPARATOR

Models: ZADSN-2 thru ZADSN-12

Date: 9/25

Job Name _____	Submitted By _____	Date _____
Location _____	Approved By _____	Date _____
_____	Order No. _____	Date _____
Engineer _____	Notes _____	
Contractor _____	_____	
Sales Rep. _____	_____	

Description

Zilmet ZADSN (Non-Removable) series Air & Dirt Separators are designed to eliminate entrained air and separate debris associated with start-up and maintenance of any hydronic systems.

- Trim package is optional. The trim package incorporates a skim valve (used to eliminate floating debris) and an air vent (to automatically release air from the separator).

Construction

Shell: Carbon Steel
 Coalescing Medium: Stainless Steel Blow Down Exterior:
 Primer Painted
 Valve (optional): Bronze
 Skim Valve (optional): Bronze
 Vent (optional): Cast Iron

Performance Limitations Maximum Design Temperature: 250°F Maximum Design Pressure: 150 PSIG*


*125, 200 & 250 PSIG available

Model Number	Part Number	Max Flow (GPM)	Tagging Information	Quantity
ZADSN-2	72308001	69		
ZADSN-2-NPT	72308012	69		
ZADSN-2.5	72308034	108		
ZADSN-2.5-NPT	72308045	108		
ZADSN-3	72308067	144		
ZADSN-3-NPT	72308078	144		
ZADSN-4	72308100	255		
ZADSN-5	72308133	398		
ZADSN-6	72308155	570		
ZADSN-8	72308177	945		
ZADSN-10	72308199	1440		
ZADSN-12	72308221	2100		

Typical Specification

Furnish and install, as shown on plans, a ZADSN-_____ Air & Dirt Separator as manufactured by Zilmet USA Company. Each separator must be designed with a blow down valve, skim valve, and automatic air vent. The separator must also utilize in its design a stainless steel coalescing medium to aid in the separation of air and dirt in the systems entrained water. The separator must be constructed in accordance with most recent addendum of Section VIII Division 1 of the ASME Boiler and Pressure Vessel Code and shall be constructed and stamped for 150 PSI working pressure @ 250°F.

Each air separator shall be Zilmet model number ZADSN-_____ or approved equal.

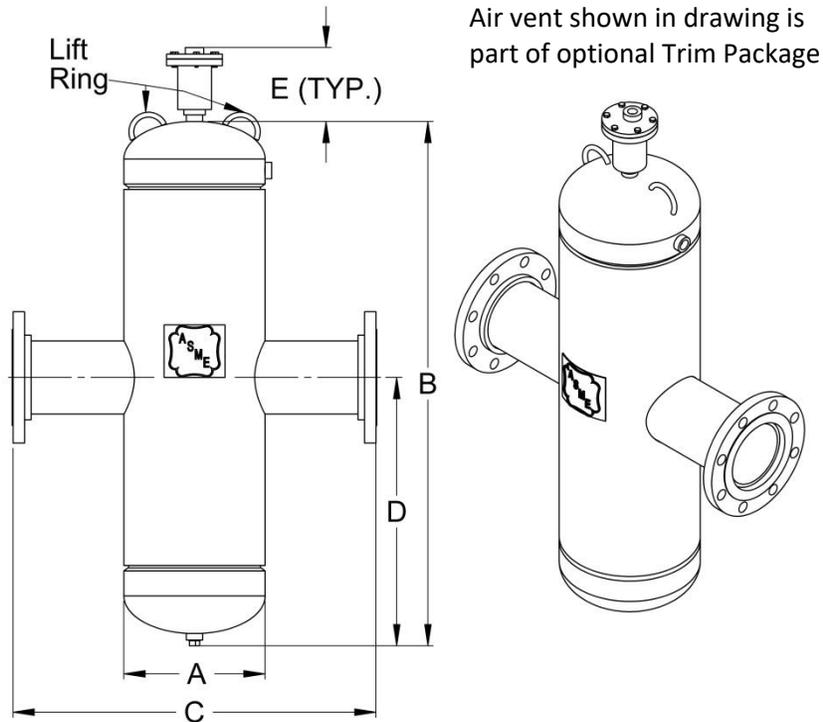

ZADSN-2 thru ZADSN-12

Dimensions & Weights

Model Number	Dimensions in Inches						Approx Shipping Wt (Lbs)
	Connection Size	A	B	C	D	E	
ZADSN-2	2	4 1/2	23	15 1/4	11 1/2	8 5/8	76
ZADSN-2-NPT				9			70
ZADSN-2.5	2.5	5 1/2		15 3/4			99
ZADSN-2.5-NPT				10 1/2			90
ZADSN-3	3	6 1/2	29	20 1/4	14 1/2		114
ZADSN-3-NPT				12 3/4			100
ZADSN-4	4	8 1/2		20 5/8			194
ZADSN-5	5	10	39	27 3/4	19 1/2		230
ZADSN-6	6	12					255
ZADSN-8	8	16	49	33 5/8	24 1/2		514
ZADSN-10	10	20	65	37 1/2	32 1/2		770
ZADSN-12	12	24	76	42 1/2	38		1080

Notes

- Trim package is optional.